



Galvanised Blue Pin Screw Pin Shackles Tested & Certified

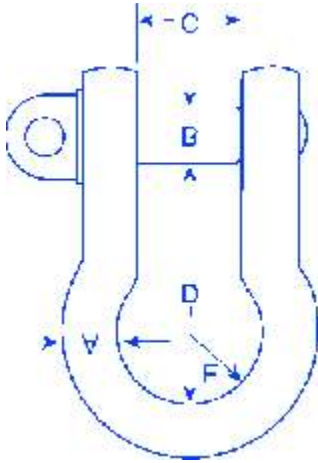

Screw Pin Bow Shackle

SWL Tons	0.33	0.5	0.75	1	1.5	2	3.25	4.75	6.5	8.5	9.5
A mm	5	6.4	8	9.5	11	12.7	16	19	21.7	25.4	28.5
B thread dia mm	6	8	10	11	12	16	19.8	22	27	30	33
C mm	9.5	12	13	17	18	20.6	27	32	36.6	43	46
D BOW mm	22	28.6	31	36.5	42.5	47.3	60.5	71.5	84	96	108
D DEE mm	-	22	26	32	36.5	41.3	51	62	74.8	81	90
2E mm	16	20	21	26	29	32	43	51	58	68	75
Weight Kgs/each	0.02	0.06	0.11	0.15	0.21	0.37	0.65	1.06	1.56	2.32	3.28

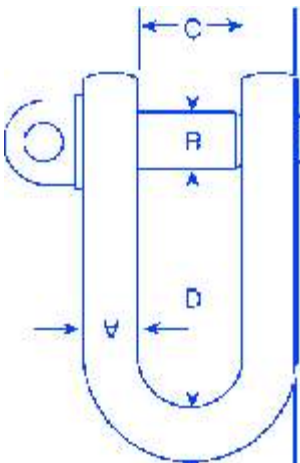

Screw Pin Dee Shackle

SWL Tons	12	13.5	17	25	35	55
A mm	31.5	34.9	38	44	50	63.5
B thread dia mm	36	39	42	52	56	68
C mm	51.6	57	60	73	82	105
D BOW mm	119	133.5	147	178	197	267.5
D DEE mm	100.8	112.5	125	146.5	171	203
2E mm	83	92	99	126	138	180
Weight Kgs/each	4.51	5.93	7.89	13.4	18.85	37.86

**These items meet the performance requirements of
US FED Specification RR-C-271 and EN-13889**

These items meet the performance requirements of the now withdrawn standard BS 3032