


## Commercial Pattern Straining Screws

### Galvanized Commercial Pattern Open Body Straining Screws (generally to Din 1480) Hook and Eye - Untested

Dia A mm	6	8	10	12	16	20	24
B mm	110	110	125	125	170	200	255
C mm	8	10.5	13	16	20	21	26
F mm	9	10	14	16	22	24	27
L-Min mm	172	184	222	241	311	358	453
L-Max mm	258	264	311	324	427	490	630
Weight Kgs/100	11	20	28	43	100	160	280

Galvanised Commercial  
Quality Straining Screws

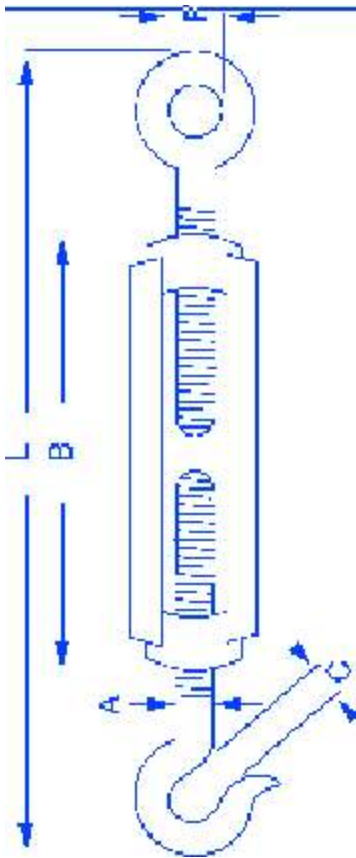

### Galvanized Commercial Pattern Open Body Straining Screws (generally to Din 1480) Eye and Eye - Untested

Dia A mm	6	8	10	12	16	20	24
B mm	110	110	125	125	170	200	255
F mm	9	10	14	16	22	24	27
L-Min mm	160	168	210	222	300	334	410
L-Max mm	246	248	300	305	416	466	587
Weight Kgs/100	11	20	28	43	100	160	280

### Galvanized Commercial Pattern Open Body Straining Screws (generally to Din 1480) Hook and Hook - Untested

Dia A mm	6	8	10	12	16	20	24
B mm	110	110	125	125	170	200	255
C mm	8	10.5	13	16	20	21	26
L-Min mm	184	200	234	260	322	382	496
L-Max mm	270	280	323	343	438	514	673
Weight Kgs/100	11.0	20.0	28.0	43	100	160	280