


Large Dee Shackles c/w Type A Screw Collar Pin. Tested & Certified

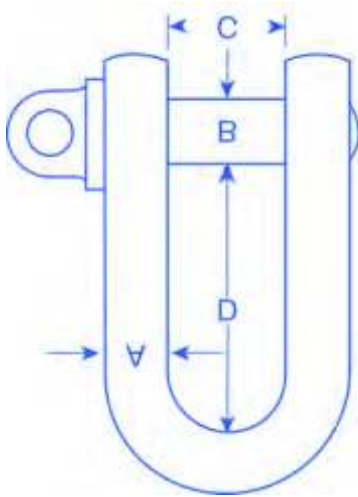

Dee Shackles

SWL Tons	0.25	0.5	0.75	1.5	2	3	3.75	5	6	7	9.5
A Inches	1/4	3/8	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2
B Inches	3/8	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 3/4
C Inches	1/2	3/4	1 1/8	1 1/4	1 1/2	1 3/4	2	2 1/8	2 3/8	2 5/8	2 3/4
D Inches	1	1 1/2	2 1/8	2 1/2	2 7/8	3 1/4	3 3/4	4 1/8	4 1/2	5	5 3/8
E Inches	3/4	1	1 1/4	1 1/2	1 3/4	2	2 1/4	2 1/2	2 3/4	3	3 1/2
Weight Kgs/each	0.10	0.12	0.29	0.57	0.92	1.59	2.27	3.18	4.54	6.06	8.74

Small Dee Shackles c/w Type A Screw Collar Pin. Tested & Certified



SWL Tons	0.3	0.63	1.00	1.75	2.50	3.50	4.50	5.50	7.00	8.00	10.75
A Inches	1/4	3/8	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2
B Inches	3/8	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 3/4
C Inches	3/8	5/8	7/8	1	1 1/4	1 3/8	1 1/2	1 3/4	1 7/8	2 1/8	2 3/8
D Inches	7/8	1 3/8	1 7/8	2 1/4	2 3/4	3 1/4	3 5/8	4 1/8	4 1/2	5	5 1/2
E Inches	3/4	1	1 1/4	1 1/2	1 3/4	2	2 1/4	2 1/2	2 3/4	3	3 1/2
Weight Kgs/each	0.06	0.15	0.33	0.61	0.93	1.80	2.15	3.02	4.20	5.34	8.36

These items meet the performance requirements of the now withdrawn standard BS 3032