


Alloy – Grade 10 Chain Sling Working Load Chart

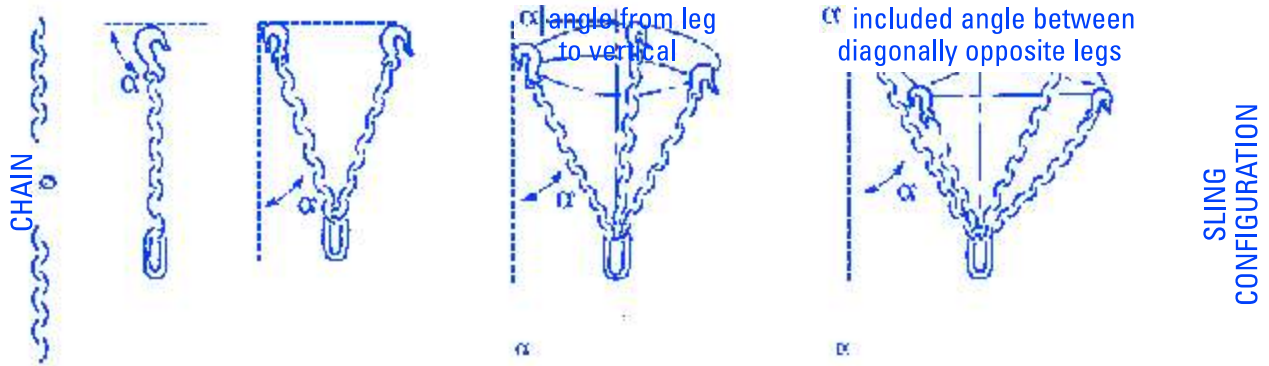

ANGLE	90°	0° - 45°	45° - 60°	0° - 45°	45° - 60°	0° - 45°	45° - 60°	ANGLE
7mm	2.00	2.80	2.00	4.20	3.00	4.20	3.00	Multiply Single Leg
8mm	2.60	3.65	2.60	5.50	3.90	5.50	3.90	WORKING LOAD LIMIT IN TONNES
10mm	4.00	5.60	4.00	8.40	6.00	8.40	6.00	
13mm	6.80	9.50	6.80	14.30	10.20	14.30	10.20	
16mm	10.30	14.40	10.30	21.65	15.50	21.65	15.50	

ALL FIGURES IN ACCORDANCE WITH BSEN 818-4

ADVICE FOR USE

DO'S ...

- 1 **Do** check the condition of the slings before each load
- 1 **Do** check the chain legs are not twisted
- 1 **Do** check that the load is on the centre of the hook and not on the tip

DONT'S ...

- 1 **Don't** use the sling over the maximum working load limit
- 1 **Don't** load with the convergence angle over 120°
- 1 **Don't** shock load
- 1 **Don't** use Grade 8 chains in pickling or acid baths
- 1 **Don't** submit the chains to heat treatment