


BS 464 Thimbles/Towing Thimbles

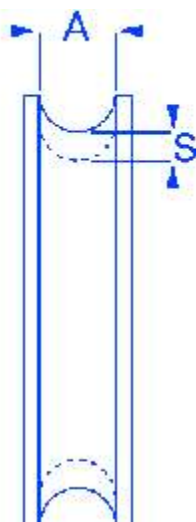

Galvanised BS 464 Thimbles

Rope Dia Inches	1/4	5/16	3/8	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 5/8	1 3/4	2
A mm	7	8	10	14	16	21	22	27	29	33	38	41	43	51	64
B mm	45	54	64	80	98	124	133	162	178	197	229	254	254	286	330
L mm	26	33	38	44	59	73	83	108	111	133	152	165	165	178	203
C mm	18	22	25	32	41	51	57	70	76	95	105	114	114	127	140
S mm	4	4	4.8	5.6	4.9	9.5	9.5	10.3	12.7	12.7	15.9	17.5	17.5	25.4	28.6
Weight Kgs/100	4.1	6.5	9.5	15	30	51.5	69.0	99.5	129	145	238	340	499	532	695

The thimbles detailed above will meet the performance requirements of the new Standard BS-EN-13411