



Galvanised Wire Rope Grips meet the performance requirements of DIN 1142 & EN 13411 Pt5 Type A

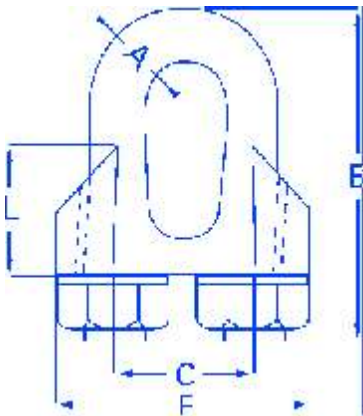

EN 13411 / DIN 1142 and Grooveless Grips

Rope Dia mm	5	6.5	8	10	12	13	14	16	19	22	26	30	34	40
A mm	5	6	8	8	10	12	12	14	14	16	20	20	22	24
B mm	25	32	41	46	56	64	66	76	83	96	111	127	141	159
C mm	12	14	18	20	24	27	28	32	36	40	46	54	60	68
D mm	13	17	20	24	28	30	31	35	36	40	50	55	60	65
F mm	25	30	39	40	50	55	59	64	68	74	84	95	105	117
H mm	13	16	20	20	24	28	28	32	32	34	38	41	45	49
L mm	13	14	18	21	25	29	30	35	40	44	51	59	67	77
Weight Kgs/100	2.1	4	8.2	9.2	25	27.5	35	43	49	68	117	140	213	268

Galvanised Wire Rope Grips (without grooves)

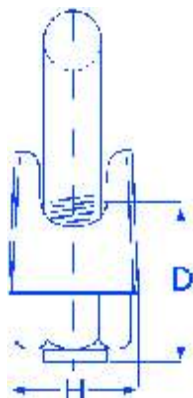

Rope Dia mm	3	5	6.5	8	10	13	16	19	22	26	30	34	40
A mm	4	5	5	6	8	10	12	12	14	14	16	16	16
B mm	20	24	28	34	42	55	63	75	85	95	110	120	140
C mm	9	11	13	16	19	24	29	32	37	41	48	52	58
D mm	12	13	15	19	22	30	33	38	44	45	50	55	60
F mm	21	23	26	30	34	42	50	54	61	65	74	80	88
H mm	10	11	12	14	18	23	26	29	33	35	37	42	45
L mm	10	10	11	15	17	21	26	30	34	37	43	50	55
Weight Kgs/100	1.4	1.5	2.1	4.1	6.8	13.0	21.0	28.0	40.0	44.0	66.0	85.0	104.0